



Phone : 604 900 1434 Tollfree + 1 800 8941 LED E-mail : info@northernlighting.ca



Recessed Adjustable Downlight Series

LUMIFLEX LED Downlight

360° rotation 45° tilt

Specifications

| | |
|--|-----------------------------------|
| Type: | Recessed Adjustable LED Downlight |
| Lumen Output: | >1800 lm |
| Colour Temperature: | 2,700-6,500°K |
| Distribution Angle: | 24° |
| Working Voltage: | 110~240V AC 50/60Hz |
| Power: | 20W |
| Efficacy & CRI (R_a): | >95 lumens/watt & >80 Ra |
| Average Lamp Life: | 50,000 Hours* |
| LED Chip Type: | Bridgelux COB |


Key Features & Benefits

- Over 60% Energy savings** – compared to metal halide lighting
- Maintenance Free** – Approximate 15 Year lifespan*
- High Light Output** – Direct light output equal to 35w metal halide
- Cool running** – Negligible heat so reduces air conditioning usage & fire risk
- No IR or UV light output** – Will not attract flying insects
- Adjustability** – Movable head. Rotates through 360° and tilts by up to 60°
- RoHS & UL certified** - Compliant with international quality standards
- Warranty** – 5 Years
- Construction** – Heavy duty heatsink, aluminium bezel & clear glass

Order Codes

| | | | | |
|-----|-----------|--------|---|--------------------|
| 20W | Downlight | 2700°K | - | NL-LUMIFLEX-20W-WW |
| 20W | Downlight | 4000°K | - | NL-LUMIFLEX-20W-NW |
| 20W | Downlight | 5000°K | - | NL-LUMIFLEX-20W-CW |

Available in:
15w, 20w & 25w outputs
Black, White, Brushed
Nickel trim

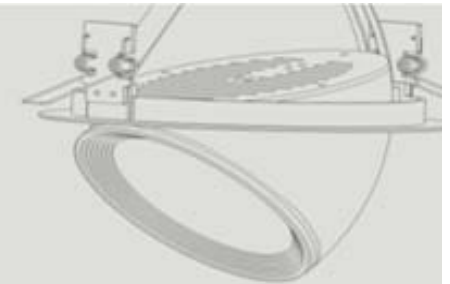

* Based on normal 40 hr/week operating conditions

Technical details may be subject to change at short notice. Verify specific details before ordering.

